



## FEATURES

- VariColour filter blocked warning system
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Quiet in operation
- Simple to install and easy to relocate

## SPECIFICATIONS

Voltage	230v	90v - 254v
Wattage	0.14kW	0.21kW
Frequency	50Hz / 60Hz	50Hz / 60Hz
Cabinet Height	493mm	493mm
Cabinet Width	308mm	308mm
Cabinet Depth	330mm	330mm
Cabinet Weight	14kg	14kg
Sound Level	<60dBa	<60dBa
Airflow	170m3/h	160 - 200m3/h

## INCLUDED AS STANDARD...

### FILTERS



**Main Filter**  
**Code**  
110507

**Description**  
HEPA/Chemical



**Pre-filter**  
**Code**  
111124

**Description**  
F8/F9 Labyrinth

Find out more:

[www.smarttec.dk](http://www.smarttec.dk)

**smartTec**  
smart technology products and solutions

## CONNECTION KIT

*Connection kit is included  
see overleaf for options*

# OPTIONS

## Main Filter


**Code:**  
110504

**Description:**  
Chemical

## Connection Kits

### Machine + Hose Kit

Voltage	Part Number
230v	<b>072140</b>
Multi Voltage	<b>072141</b>




**Includes:**  
3m x 50mm flexible hose  
2 x connecting cuffs



### Machine + 38mm Single Arm Kit


Voltage	Part Number
230v	<b>072142</b>
Multi Voltage	<b>072143</b>

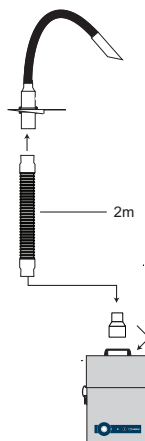

**38mm Single arm kit includes:**  
1 x 80 - 51mm reducer  
1 x Arm Kit (100295) *see below*

### Machine + 38mm Dual Arm Kit

Voltage	Part Number
230v	<b>072144</b>
Multi Voltage	<b>072145</b>

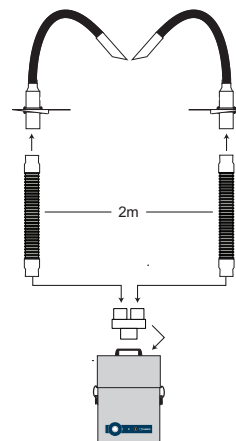

**38mm Dual arm kit includes:**  
1 x 80 - 51mm dual manifold  
2 x Arm Kits (100295) *see below*

### 100295

**Includes:**  
1 x 2m x 50mm flexible hose  
2 x connecting cuffs  
1 x 38mm stainless steel flexible arm with valve  
1 x 95mm conical cowl  
1 x 38mm pen nib  
1 x clamped bench bracket



## Replacement Arms

**Code:**  
120128

**Description:**  
38mm x 1.5m  
flexible stainless  
steel arm

120129

38mm x 0.75m  
flexible stainless  
steel arm

120199

38mm x 0.5m  
flexible stainless  
steel arm

38mm



## Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

*Take a look through our Interfacing Guide to see our extensive range of options*

**PUREX**  
FUME EXTRACTION SYSTEMS

**smartTec**  
smart technology products and solutions